


## Features

- Isolation voltage 3500 V~
- Industrial Standard Package
- High Surge Capability
- Glass Passivated Chips
- Simple Mounting
- Electrically Isolated by DBC Ceramic



## Applications

- DC Motor Control and Drives
- Battery Charges
- Welders
- Power Converters
- Lighting Control
- Heat and Temperature Control

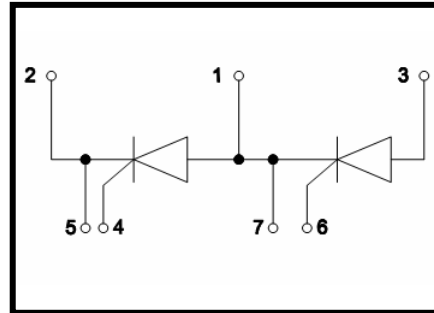

## Advantages

- Space and weight savings
- Improved temperature and power cycling

## ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$  unless otherwise specified

Symbol	Test Condition	Value	Unit
$V_{RRM}/V_{DRM}$		1600	V
$I_{T(AV)}$	$T_C=85^{\circ}\text{C}$ , 180° conduction, half sine wave;	60	A
$I_{T(RMS)}$	as AC switch;	135	A
$I_{TSM}$	$T_J=45^{\circ}\text{C}$ , $t=10\text{ms}$ (50Hz), sine, $V_R=0$ ;	1310	A
	$T_J=45^{\circ}\text{C}$ , $t=8.3\text{ms}$ (60Hz), sine, $V_R=0$ ;	1370	
	$T_J=45^{\circ}\text{C}$ , $t=10\text{ms}$ (50Hz), sine, $V_R=V_{RRM}$ ;	1100	
	$T_J=45^{\circ}\text{C}$ , $t=8.3\text{ms}$ (60Hz), sine, $V_R=V_{RRM}$ ;	1150	
$I^2t$	$T_J=45^{\circ}\text{C}$ , $t=10\text{ms}$ (50Hz), sine, $V_R=0$ ;	8.56	$\text{K A}^2\text{s}$
	$T_J=45^{\circ}\text{C}$ , $t=8.3\text{ms}$ (60Hz), sine, $V_R=0$ ;	7.82	
	$T_J=45^{\circ}\text{C}$ , $t=10\text{ms}$ (50Hz), sine, $V_R=V_{RRM}$ ;	6.05	
	$T_J=45^{\circ}\text{C}$ , $t=8.3\text{ms}$ (60Hz), sine, $V_R=V_{RRM}$ ;	5.53	
$I_{DRM}/I_{RRM}$	$T_J=130^{\circ}\text{C}$ , $V_D=V_R=1600\text{V}$ , gate open circuit;	15	mA
dV/dt	$T_J=130^{\circ}\text{C}$ , exponential to 67% rated $V_{DRM}$	500	V/us
$V_{ISOL}$	50Hz, all terminals shorted, $t=1\text{s}$ , $I_{ISOL}\leq 1\text{mA}$ ;	3500	V~
$T_J$	Max. junction operating temperature range	-40~125	$^{\circ}\text{C}$
$T_{STG}$	Max. storage temperature range	-40~125	$^{\circ}\text{C}$

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: [www.macmicst.com](http://www.macmicst.com)

**ELECTRICAL CHARACTERISTICS**T<sub>C</sub>=25°C unless otherwise specified

Symbol	Test Condition	Min.	Typ.	Max.	Unit
V <sub>TO</sub>	16.7% x p x I <sub>AV</sub> < I < p x I <sub>AV</sub> , T <sub>J</sub> =130°C;			0.85	V
	I > p x I <sub>AV</sub> , T <sub>J</sub> =130°C;			0.88	V
r <sub>t</sub>	16.7% x p x I <sub>AV</sub> < I < p x I <sub>AV</sub> , T <sub>J</sub> =130°C;			3.53	mΩ
	I > p x I <sub>AV</sub> , T <sub>J</sub> =130°C;			3.41	mΩ
I <sub>H</sub>	V <sub>AK</sub> = 6V, resistive load;			200	mA
I <sub>L</sub>	Anode supply =6V, resistive load=1Ω, gate pulse =10V, 100us;			400	mA
V <sub>TM</sub>	I <sub>TM</sub> =188A, t <sub>d</sub> =10 ms, half sine			1.54	V
P <sub>GM</sub>	t <sub>p</sub> ≤5ms, T <sub>J</sub> =125°C;			10	W
P <sub>GM(AV)</sub>	f=50Hz, T <sub>J</sub> =125°C;			2.5	W
I <sub>GM</sub>	t <sub>p</sub> ≤5ms, T <sub>J</sub> =125°C;			2.5	A
-V <sub>GT</sub>				10	V
V <sub>GT</sub>	V <sub>A</sub> =6V, R <sub>A</sub> =1Ω, T <sub>J</sub> =-40°C;			4	V
	V <sub>A</sub> =6V, R <sub>A</sub> =1Ω;			2.5	
	V <sub>A</sub> =6V, R <sub>A</sub> =1Ω, T <sub>J</sub> =125°C;			1.7	
I <sub>GT</sub>	V <sub>A</sub> =6V, R <sub>A</sub> =1Ω, T <sub>J</sub> =-40°C;			270	mA
	V <sub>A</sub> =6V, R <sub>A</sub> =1Ω;			150	
	V <sub>A</sub> =6V, R <sub>A</sub> =1Ω, T <sub>J</sub> =125°C;			80	
V <sub>GD</sub>	V <sub>AK</sub> =V <sub>DRM</sub> , T <sub>J</sub> =125°C			0.25	V
I <sub>GD</sub>				6	mA
di/dt	T <sub>J</sub> = 25°C, V <sub>D</sub> =0.67V <sub>DRM</sub> , I <sub>TM</sub> =345A, I <sub>g</sub> = 500mA, tr < 0.5 μs, tp > 6 μs			150	A/us

**THERMAL AND MECHANICAL CHARACTERISTICS**T<sub>C</sub>=25°C unless otherwise specified

Symbol	Test Condition	value	Unit
R <sub>thjc</sub>	DC operation,per junction;	0.45	K/W
R <sub>THCS</sub>	Mounting surface smooth,flat and greased,per junction	0.10	K/W
Md	Mounting torque(M5)	3 to 5	N·m
	Terminal connection torque(M5)		
Weight	Typical value	105	g

Characteristic curves

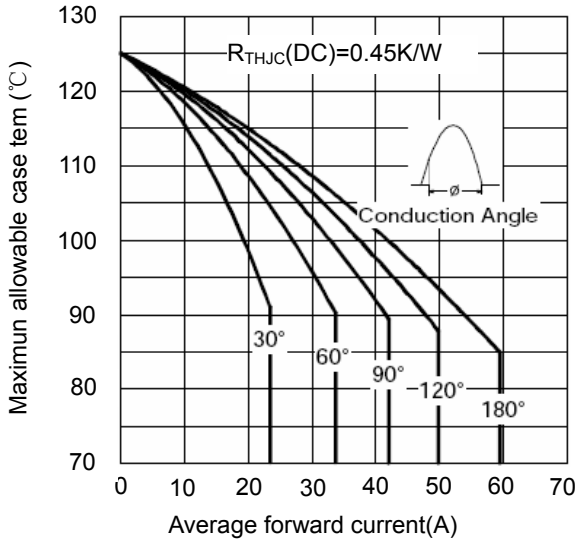


Figure 1. current rating characteristics

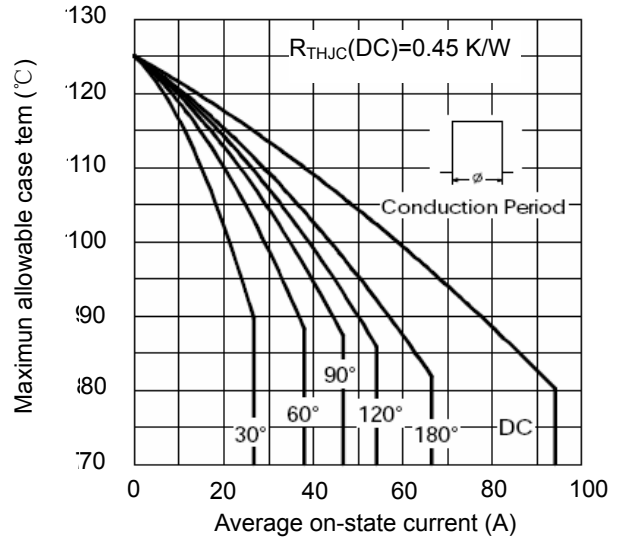


Figure 2. current rating characteristics

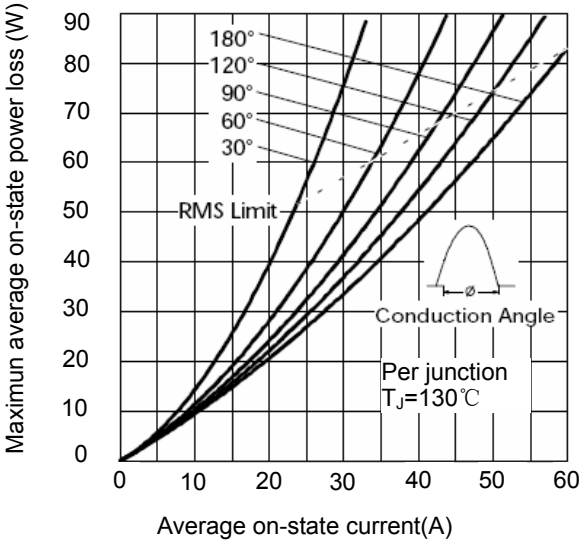


Figure 3. on-state power loss characteristics

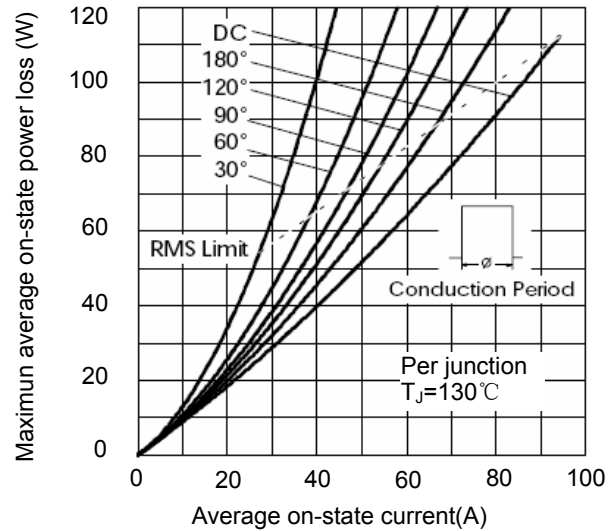


Figure 4. on-state power loss characteristics

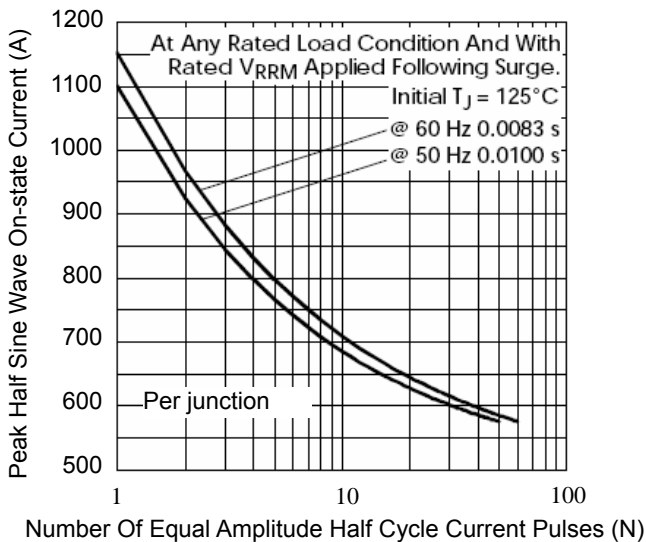


Figure 5. Maximum Non-Repetitive Surge Current

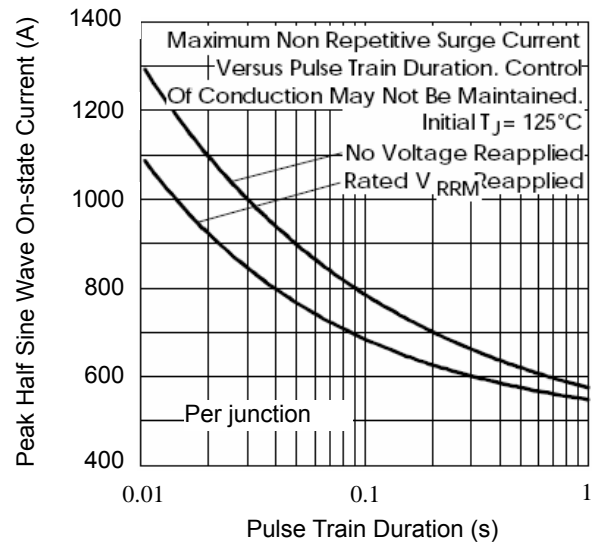


Figure 6. Maximum Non-Repetitive Surge Current

**MMK60A160B**

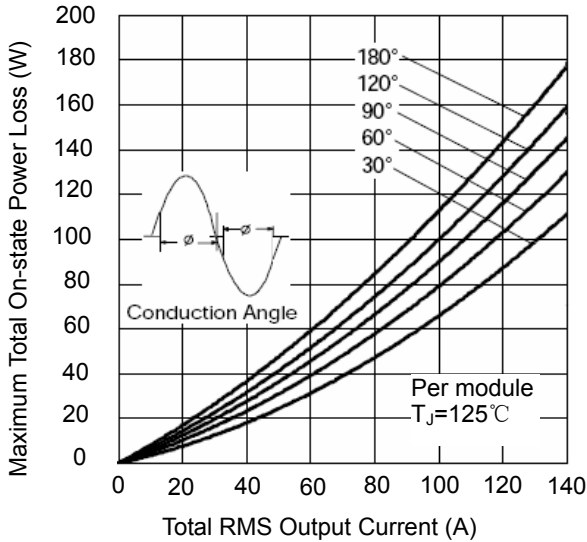


Figure 7. On-State Power Loss Characteristics-1

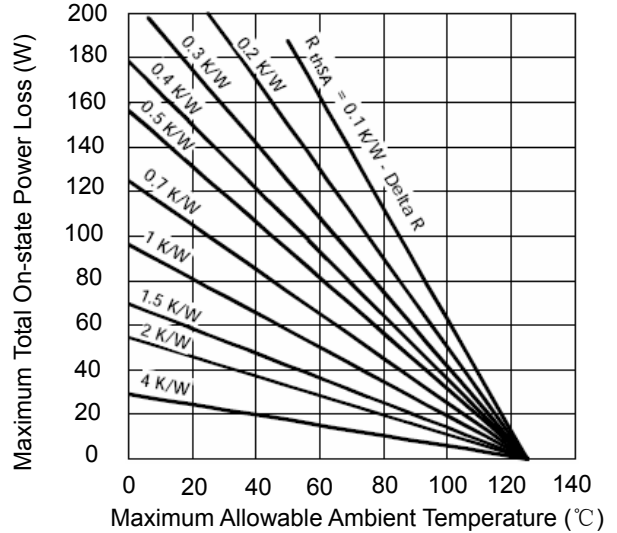


Figure 8 On-State Power Loss Characteristics-2

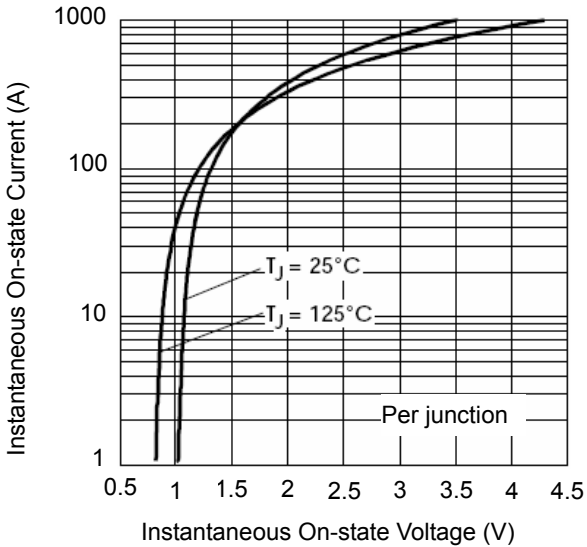


Figure 9 On State Voltage Drop Characteristics

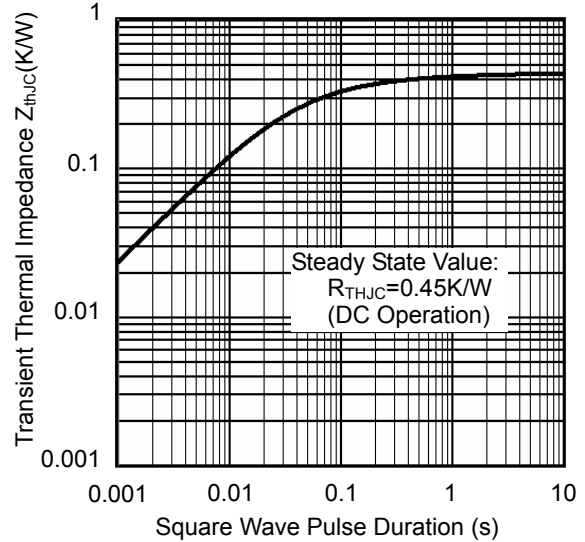


Figure 10 Thermal Impedance ZthJC Characteristics

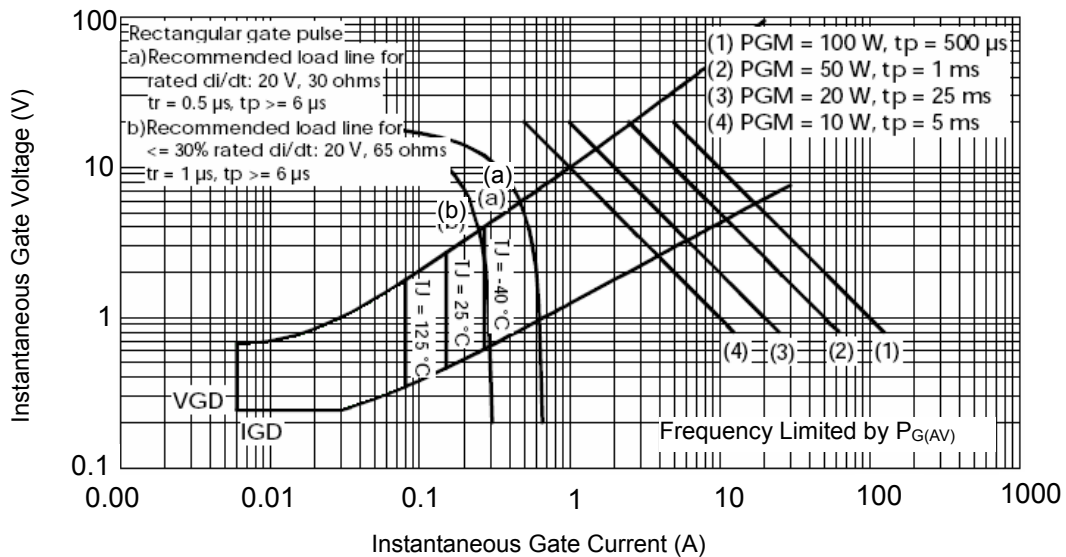


Figure 11 Gate Characteristics

Package Outline (Dimensions in mm)

